

DIAMOND



DIAMOND



**LEAN THE MACHINE ON ITS
BACK, AND REMOVE BOTH
TRANSPORT SCREWS**

DIAMOND




**REPLACE THE UNIT ON ITS LEGS ,
AND GENTLY MOVE THE SKATE
HOLDER /CARRIER ALL THE WAY
TO THE LEFT**

DIAMOND



**ADJUST THE WHEEL HEIGHT
BY PULLING OUT THE HEIGHT ADJUSTER
ON THE TOP OF THE UNIT**

DIAMOND

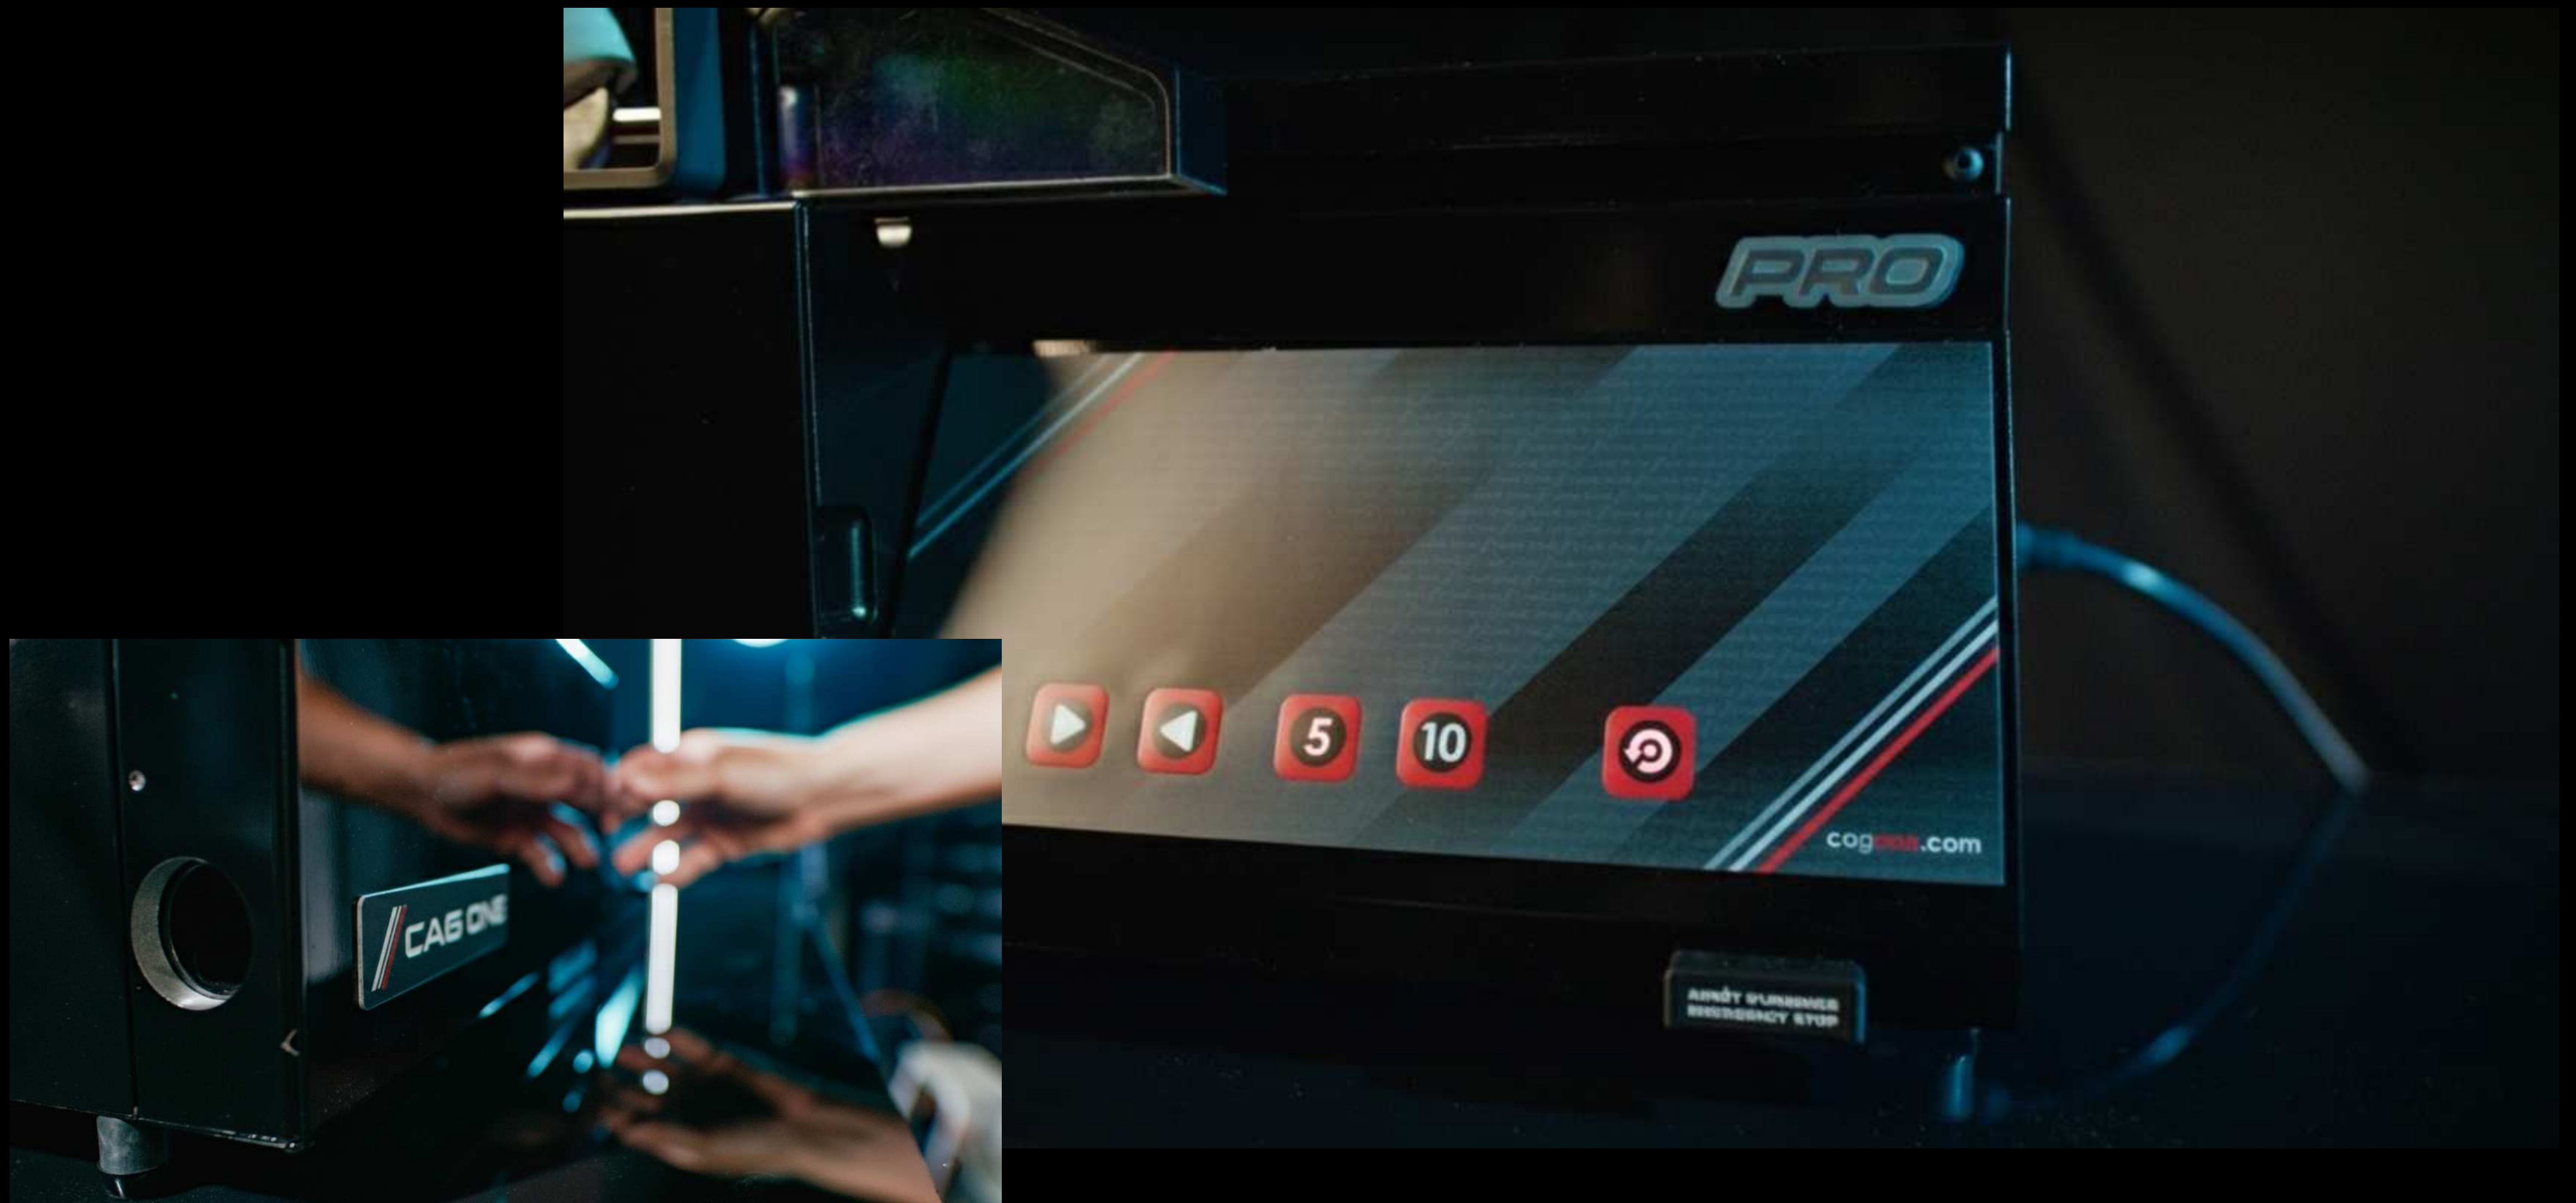

**PLUG THE POWER CABLE AND THE
VACUUM CLEANER. PUT THE
VACUUM CLEANER TO "ON" POSITION**

DIAMOND



**PULL OUT THE RED SWITCH CALLED
'EMERGENCY SWITCH' TO POWER ON**

DIAMOND



**PRESS THE HANDLE DOWN ON YOUR
LEFT TO RELEASE THE CLAMP AND
INSERT THE SKATE**

DIAMOND



**CHOOSE 5 CYCLES FOR NORMAL
SHARPENING (1:30) OR 10 CYCLES
FOR NEW/DAMAGED BLADES (3:00).**

DIAMOND




**AT THE END OF SHARPENING, A CLEAN BURR
SHOULD BE VISIBLE AND FELT ON BOTH
BLADE EDGES. IF NOT, RUN ADDITIONAL
SHARPENING CYCLES.**

DIAMOND



WHEN A BURR IS PRESENT ON BOTH EDGES, USE A CLEAN, UNDAMAGED HONING STONE. HOLD IT FLAT (NO ANGLE) AND FIRMLY HONE BOTH SIDES TO REMOVE THE BURR COMPLETELY. THE EDGES SHOULD FEEL SMOOTH AFTERWARD; IF NOT, CONTINUE HONING.

DIAMOND

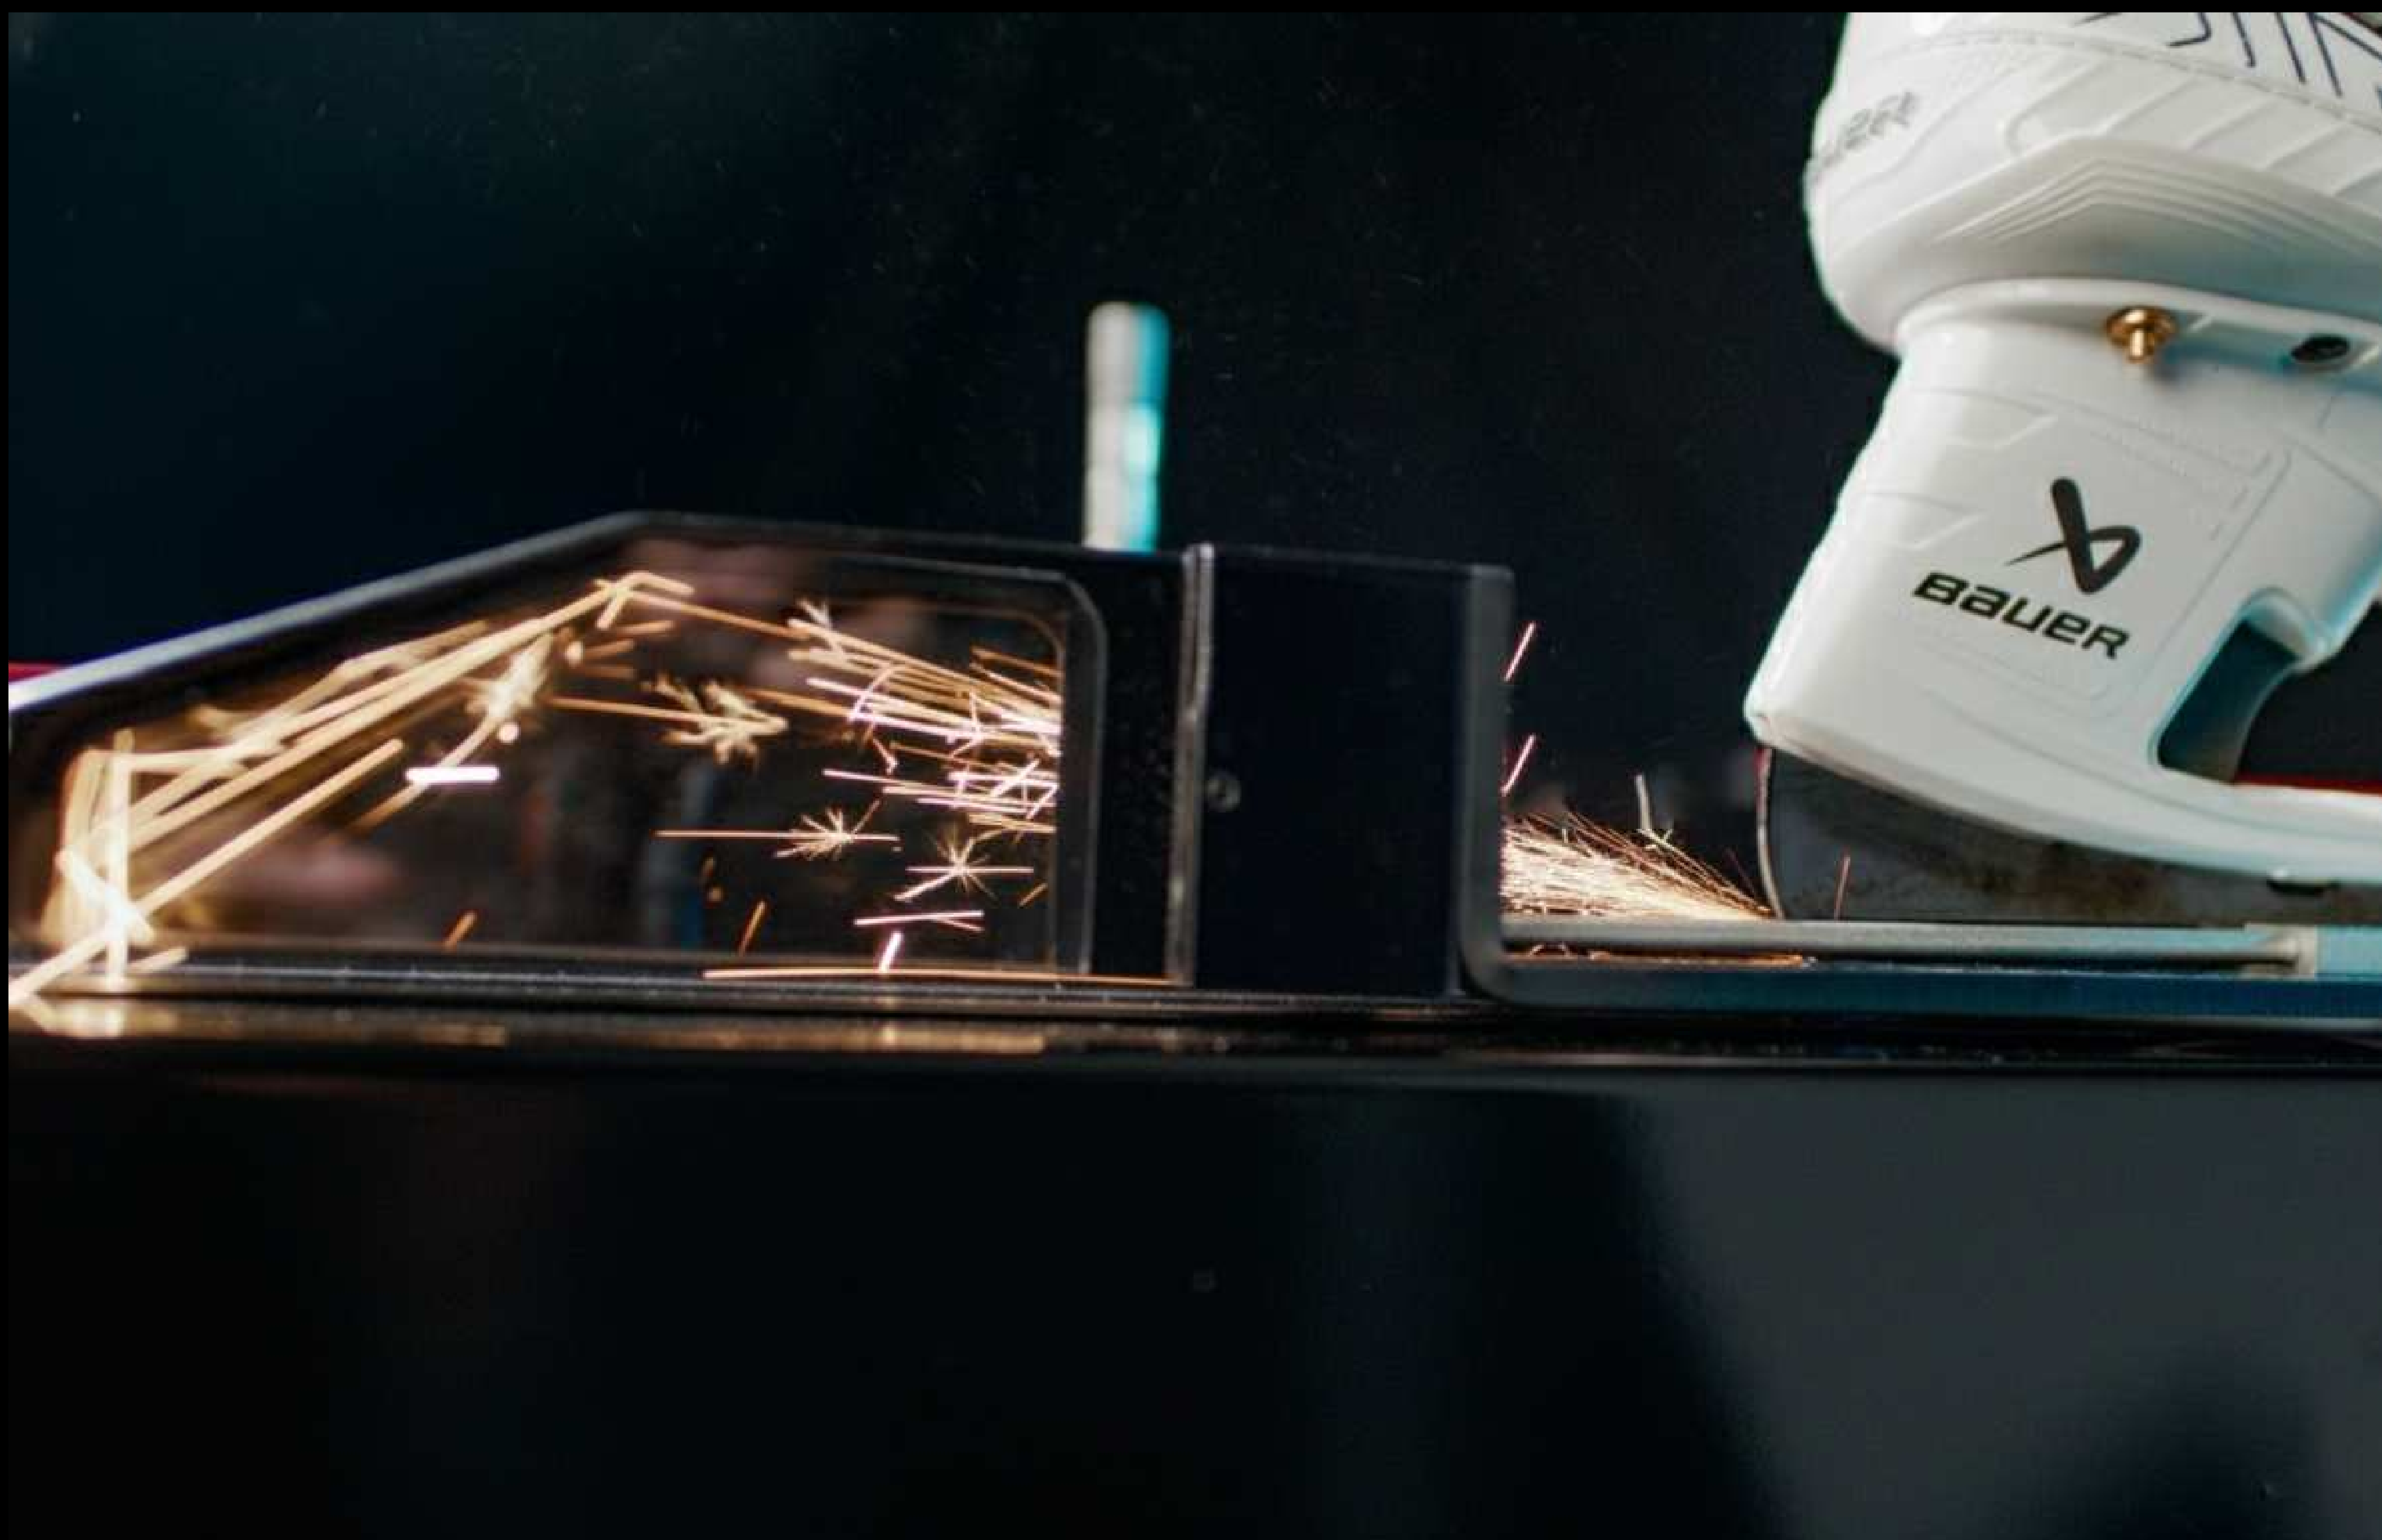

**SELECT A DEEPER HOLLOW FOR EXTRA GRIP,
OR A FLATTER RADIUS FOR A SMOOTHER GLIDE.
FOR FURTHER INFORMATION,
YOU CAN REACH US ANYTIME VIA OUR WEBSITE OR PLATFORMS.**

DIAMOND



**TO SHARPEN FIGURE SKATES, USE THE
DUAL HEIGHT ADJUSTMENT SYSTEM TO
LOWER THE GRINDING WHEEL AND
PREVENT CONTACT WITH THE TOE PICKS.**

CAG ONE DIAMOND

POWER & SIZE SPECIFICATIONS

POWER REQUIREMENTS

- VOLTAGE: 110-220 V AC
- FREQUENCY: 50/60 HZ
- POWER CONSUMPTION: 250 W
- COMPATIBLE WITH STANDARD HOUSEHOLD AND PROFESSIONAL POWER OUTLETS

DIMENSIONS & WEIGHT

- OVERALL SIZE: 28 × 9 × 11 IN
- WEIGHT: 55 LBS
- COMPACT, STABLE DESIGN FOR PORTABLE OR BENCH-TOP USE



DIAMOND

1-888-884-4747

SALES@CAGONE.COM



CAGONE.COM